

Indicative Plant Schedule

| No. | Species | Girth and Height (cm) | Times Transplanted | Clear stem (CS) or Feathered (F) | Classification | Notes |
|------|---------------------------|-----------------------|--------------------|----------------------------------|----------------|---|
| 5 | Platanus x hispanica | 20 - 25 | 4x | CS | SM/WRB (900mm) | |
| 3 | Tilia x euchlora | 25 - 30 | 4x | CS | SM/WRB | Avenue matching crown shape/height and clear stem |
| | | 1.2m (h) | Containerised | | | 2 x staggered rows at 0.5Ctr 1.2m high minimum of 5 breaks. To be protected using post and wire fence until established |
| 6250 | Narcissus pseudonarcissus | | | | | Planted at 50 per sq metre |


Note
Refer to Architects plans for all hardworks and demolition details.
Any areas disturbed during demolition shall be reinstated.
Within root zone no dig construction detail to be used.

Grass Mix
A19 Amenity seed mixture

| % | Latin name | Common name |
|----|------------------------------------|-------------|
| 30 | CORAIL Slender Creeping Red Fescue | |
| 25 | RAISA Chewings Fescue | |
| 20 | ABERELF Perennial Ryegrass | |
| 20 | CADIX Perennial Ryegrass | |
| 5 | HIGHLAND Browntop Bent | |



- Planning Application Boundary
- Existing Trees Retained
- Existing Trees Removed
- Tree Protection Barrier
- Proposed Trees
- Proposed Hedge
- Post and Wire Fence
- Amenity Grass Mix A19
- Bulb Planting

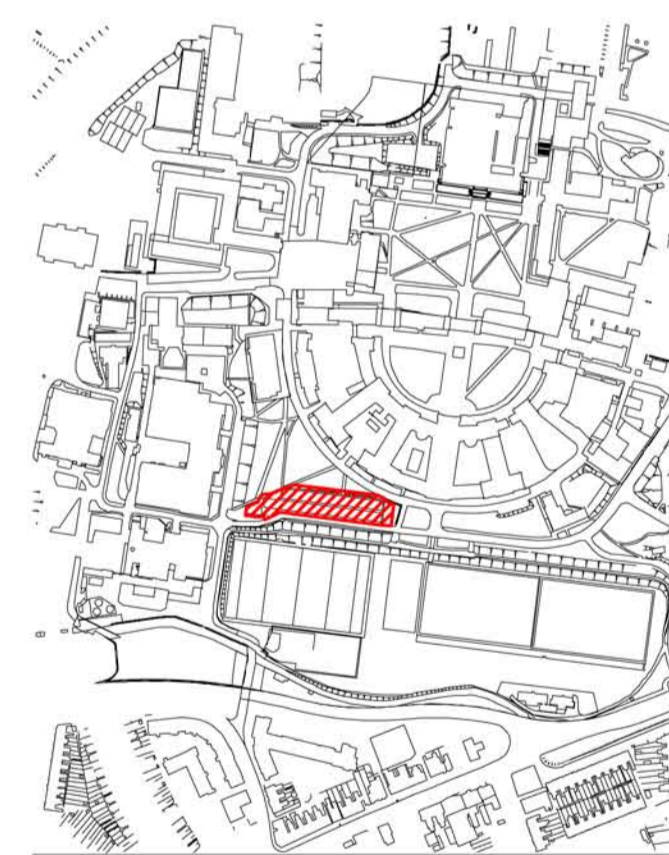

drawing status: **Planning**

project:
University of Birmingham

job number:
LP1903

drawing title:
Project 7 - Sportex Huts

drawing number:
LA-GA-L-90-07

| revision | scale | date |
|----------|------------|----------|
| - | 1:200 @ A1 | 23.02.12 |

| for information | drawn | auth | date |
|-----------------|-------|------|----------|
| | CC | RS | 23.02.12 |

for construction